



Data Sheet

32Mbit Flash Memory 56 TSOP

Manufacturers <u>Intel Corp</u>

Package/Case TSOP-56

Product Type Memory

**RoHS** 

Lifecycle



Images are for reference only

Please submit RFQ for JS28F320J3D75 or Email to us: sales@ovaga.com We will contact you in 12 hours.

**RFO** 

## **General Description**

The JS28F320J3D75 is a high-density, non-volatile memory device that provides reliable and fast data storage. It has a capacity of 32 Megabits, which is equivalent to 4 Megabytes. The "J3D" in the part number indicates the device is a member of the Intel StrataFlash memory family and has a 3.3V power supply voltage. The "75" indicates the device has a 75ns access time.

Features	Application
r catures	Application

Organization: 4 Megabytes (32 Megabits) with 8-bit data width

Code storage in various electronic systems

Single 3.3V power supply operation

Data storage in embedded applications

Fast access time: 75ns Automotive systems

Page mode read architecture for faster data transfer Industrial control systems

Embedded algorithms for reliable program and erase operations

Communication equipment


Sector erase capability for efficient data management

Networking devices

Common Flash Interface (CFI) compliant

Consumer electronics

RoHS compliant

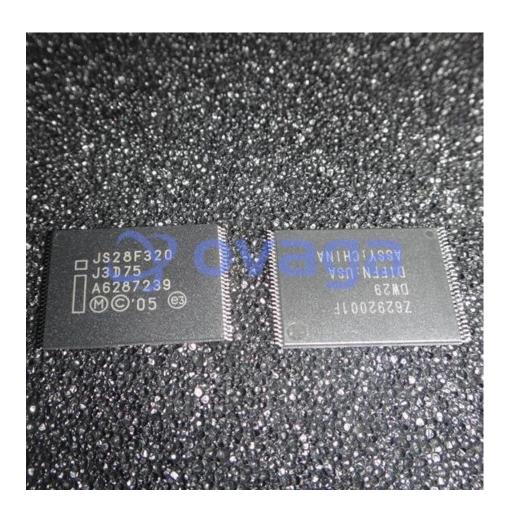



## **Related Products**



<u>JS28F128J3F75</u>

Intel Corp TSOP-56



JS28F128J3D75A

Intel Corp TSOP-56



JS28F640J3D-75

Intel Corp TSOP-56



JS28F128J3C120

Intel Corp TSOP56



JS28F128P33B85
Intel Corp
TSOP-56



JS28F128P30T85
Intel Corp
TSSOP-56



JS28F128J3D75
Intel Corp
TSSOP-56



JS28F128J3D-75
Intel Corp
TSOP56